




RECEIVED
 MAY 12 2016
 DEPARTMENT OF
 PLANNING & ZONING

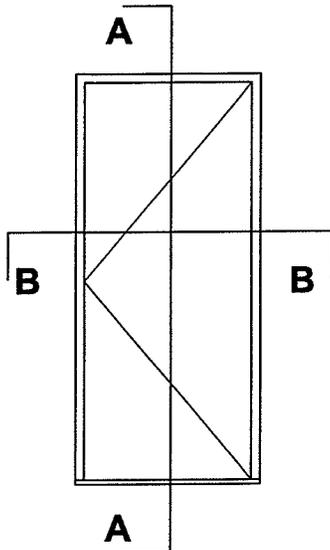

ELEV. SINGLE DOOR

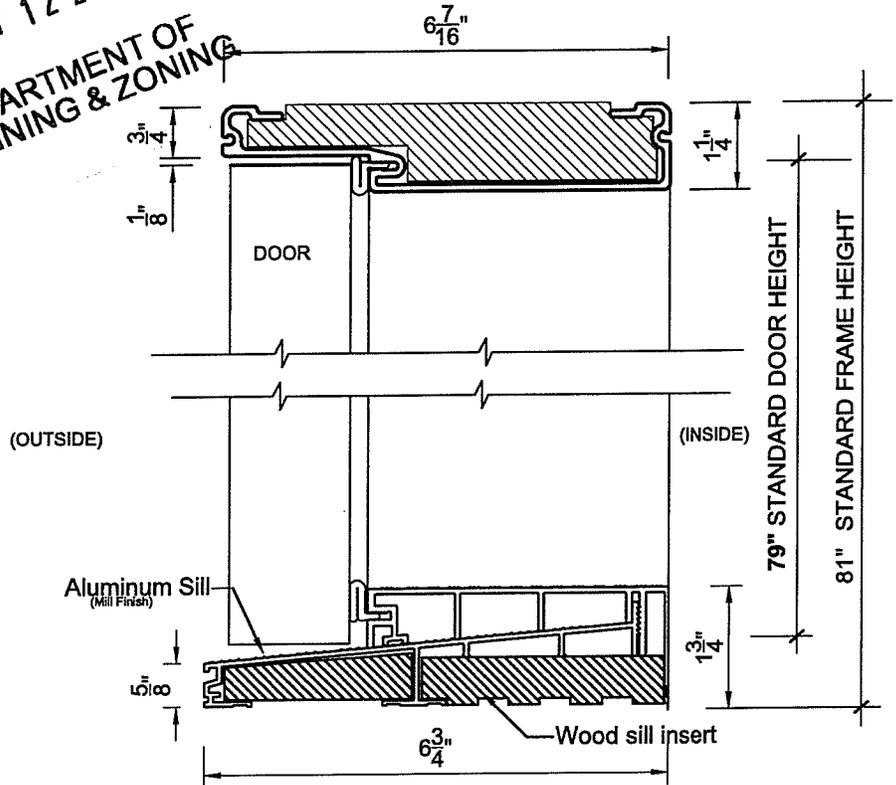

SECTION A-A

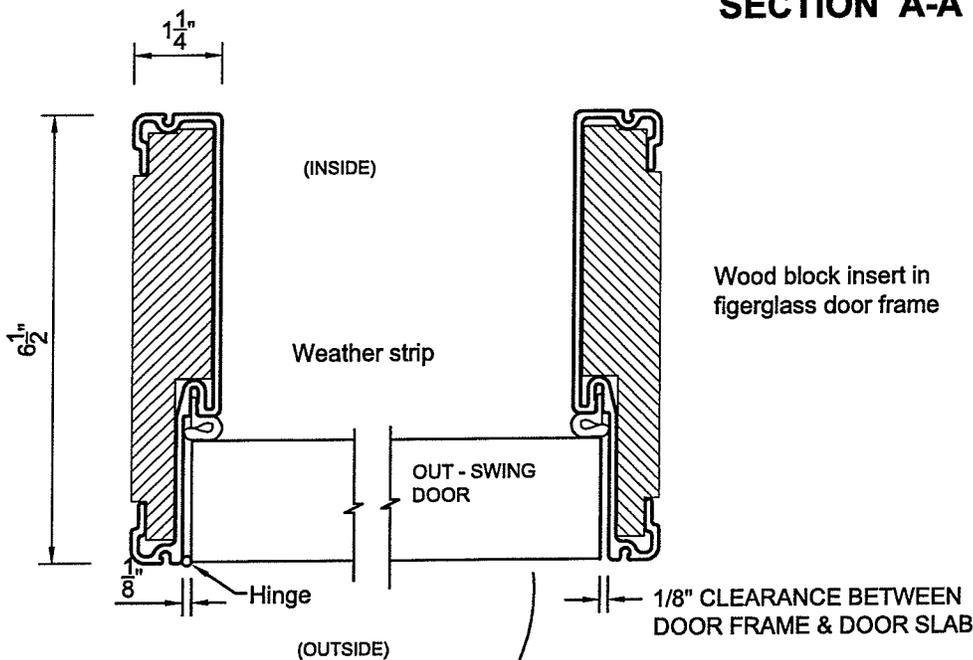

SECTION B-B

Fiberglass Entrance Door

200 Series

Product Specifications

Standard Series

6 1/2" Pultruded Fiberglass Frame filled with wood reinforcement, injection molded reinforced mitered corners with Polyurethane foam fill and sealed with silicone sealant. Optional 4 1/2" Pultruded Fiberglass Frame is available for single doors only.

Door slabs are reinforced Fiberglass skin, available in smooth skin (off white) flush or embossed pattern, and woodgrain (beige) flush or embossed pattern. Door slab stile rails use weather resistant PVC composite material.

Doors are available with brickmould.

One Lite Door Slab Series

Uses built in flush glazing bead, and can except any standard size door lite glass. This optional slab style eliminates the traditional bulky door lite glass frame.

Sill

Inswing door system uses thermally broken aluminum sill, with strategically place drainage for water.

Outswing door system uses thermally broken aluminum sill with q-lon weatherstripping to ensure a positive seal to the slab.

Test Results

Door slab has been independently tested and rated in accordance to CSA A440.0 and AAMA.

Paint Finish

Pultruded Fiberglass Frame uses standard White finish using Sequoia TM series V advanced acrylic polyurethane (water borne) baked on finish. Rated environmentally friendly due to low VOC. Fiberglass door slab comes standard unfinished, but is ready to prime and paint or stain (woodgrain).

Hardware

Optional Multipoint lock system by Ferco, is available in Polished brass, Antique brass, Satin chrome, Satin nickle, Black, Pewter, Dark bronze, and Oil rubbed bronze.

This provides added security compared to traditional lock systems.

It is highly recommended to use the Multipoint lock system on all 8' height doors.

Sizes Available



Nominal slab sizes are 30" (certain styles only), 32", 34", and 36" wide by 80" height and 96" height.

Fibertec manufacturers to sizes specified + / - 1/8" (3.17 mm) industry tolerance.

Door Handing

All diagrams must be viewed from the exterior:

LHH = Left hand hinge, RHH = Right hand hinge.



Packaging

Shrink wrap and sleeve packing is always recommended. Shipments going by Common Carrier must also be skidded.

FIBERTEC™

Window & Door Mfg.

FIBERGLASS WINDOW SYSTEMS



RECEIVED

MAY 12 2016

DEPARTMENT OF
PLANNING & ZONING

300 SERIES DOUBLE CASEMENT


CLOSED BACK FRAME
SECTION DETAILS

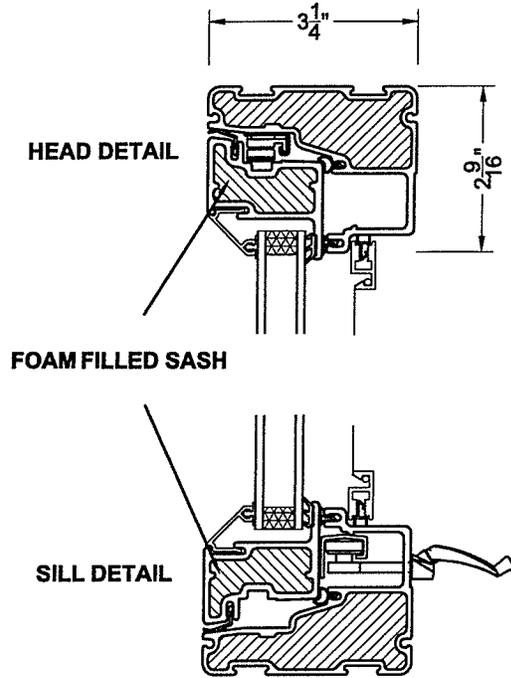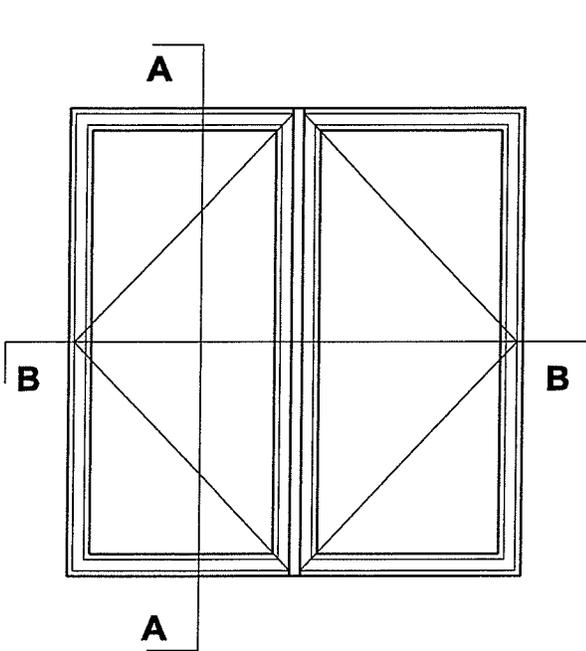

CASEMENT WINDOWS

Exterior View

SECTION A-A

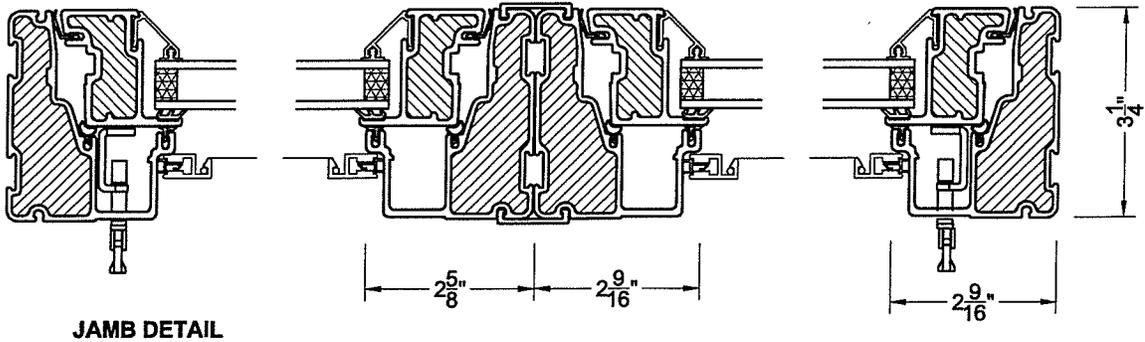


JAMB DETAIL

SECTION B-B



Item #	Diameter (A)	Height (B)
ULA112-PC	12"	9 1/2"
ULA114-PC	14"	10 1/2"
ULA116-PC	16"	12"

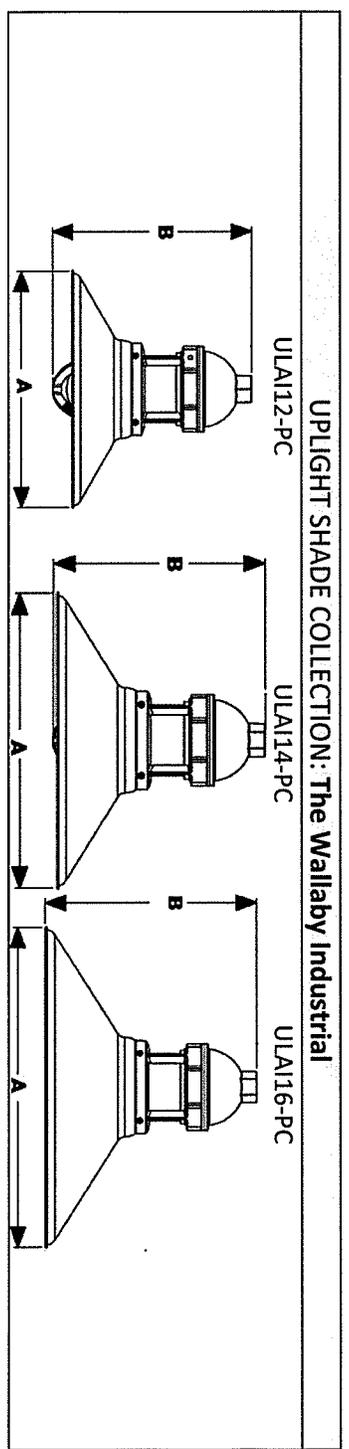


Model #	Item #	Standard Finishes	Mounting Options	Mounting Color	Optional Accessories	Accessory Colors	Wattage/Lamp Options	Ballast	Voltage
C- Cord Hung	ULA112-PC ULA114-PC ULA116-PC	Powder Coat: 100-Black 200-White 300-Dark Green 600-Bronze 605- Rust Other: 975- Galvanized	Cord: Standard ¹ : SBK SWH Cotton ² : CRZ CGM CBK	Standard Finish for ALL Mounting Is: Same as fixture // Leave Code Blank OR Cord: Canopy color: 100- Black 200-White	HSC-Hang Straight Canopy HDSM- Heavy Duty Stem Mount Canopy HDBP- Heavy Duty Backing Plate	Standard Finish for Accessories Is: Same as fixture // Leave Code Blank OR Powder Coat: 100-Black 400-Barn Red 975-Galvanized	Incandescent (Max 100 watt per socket) GU-24 Bi-Pin (Max 18 watt per socket)	Standard 120V	
		For additional colors, see color chart	Stem: ST Gooseneck: G ⁴ Specify gooseneck model	Stem and Gooseneck: 100- Black 200- White 975- Galvanized 980- Brushed Aluminum	For additional colors, see color chart	Vapor Proof Glass: CLR- Clear FST- Frosted RIB- Ribbed	LED: 16.8 watt 1600 Lumens	2700K 3500K 4000K	Standard 120V
		For additional mounting options and details, see mounting option chart	Chain Hung ³: CN Standard length is 3 ft.	Chain and Canopy color: 100- Black 200- White 975- Galvanized	For additional colors, see color chart	For additional glass options, see guard and glass chart			
BLE-C	ULA116-PC	100	SBK			100-FST			
ORDER SPECIFICS									
BLE-	-PC								

RECEIVED
MAY 12 2016

DEPARTMENT OF
PLANNING & ZONING

Notes:
¹ Suitable for Damp locations. Standard length 8 feet. ² Suitable for Dry locations Only (Not CSA listed). Standard length 6 feet. ³ Standard length is 3ft. ⁴ Additional lengths available on Cord, Stem & Chain Suitable for Wet location (except when cord mounted)

Exterior Light 'B'

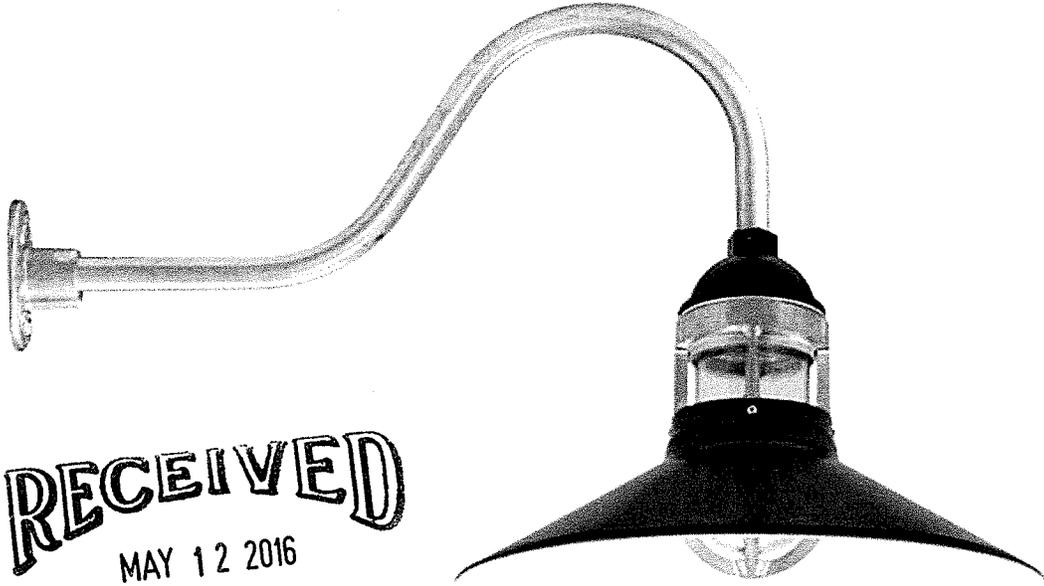

RECEIVED

MAY 12 2016

DEPARTMENT OF
PLANNING & ZONING



RECEIVED

MAY 12 2016

DEPARTMENT OF
PLANNING & ZONING

EXAMPLE OF PORCH POST



RECEIVED


MAY 12 2016

DEPARTMENT OF
PLANNING & ZONING

EXAMPLE OF BRACKET

RECEIVED

MAY 12 2016

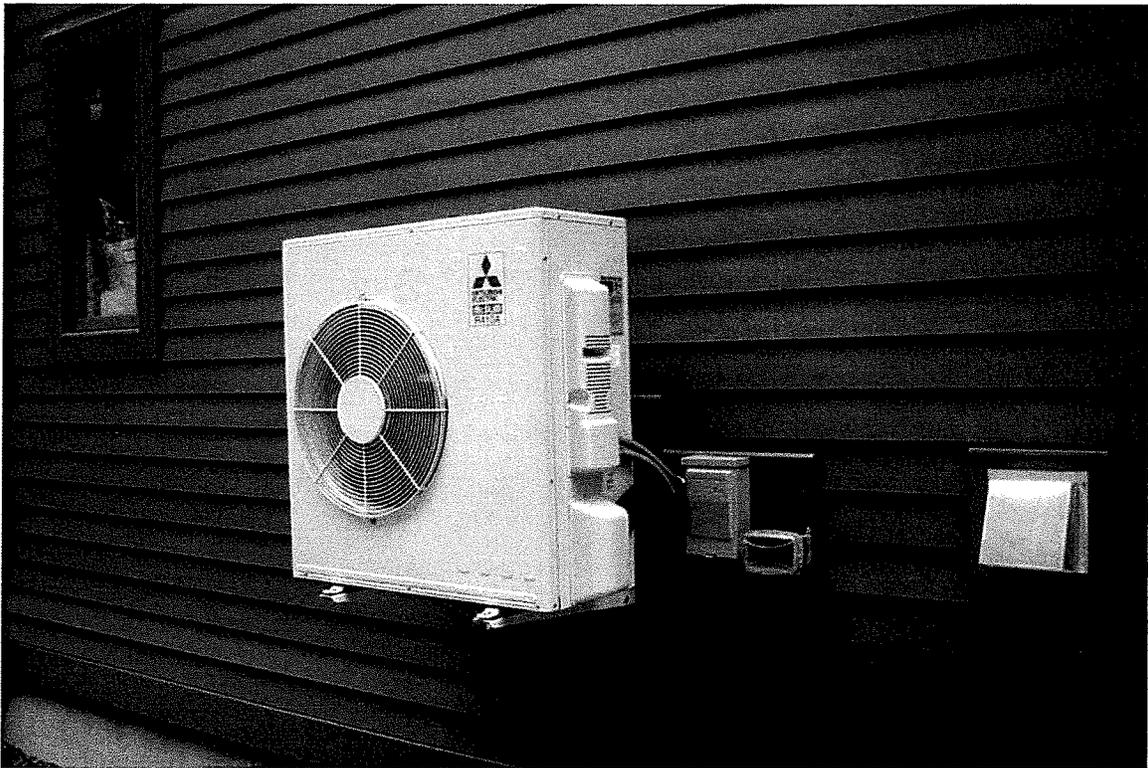

EXAMPLE OF CONDENSER