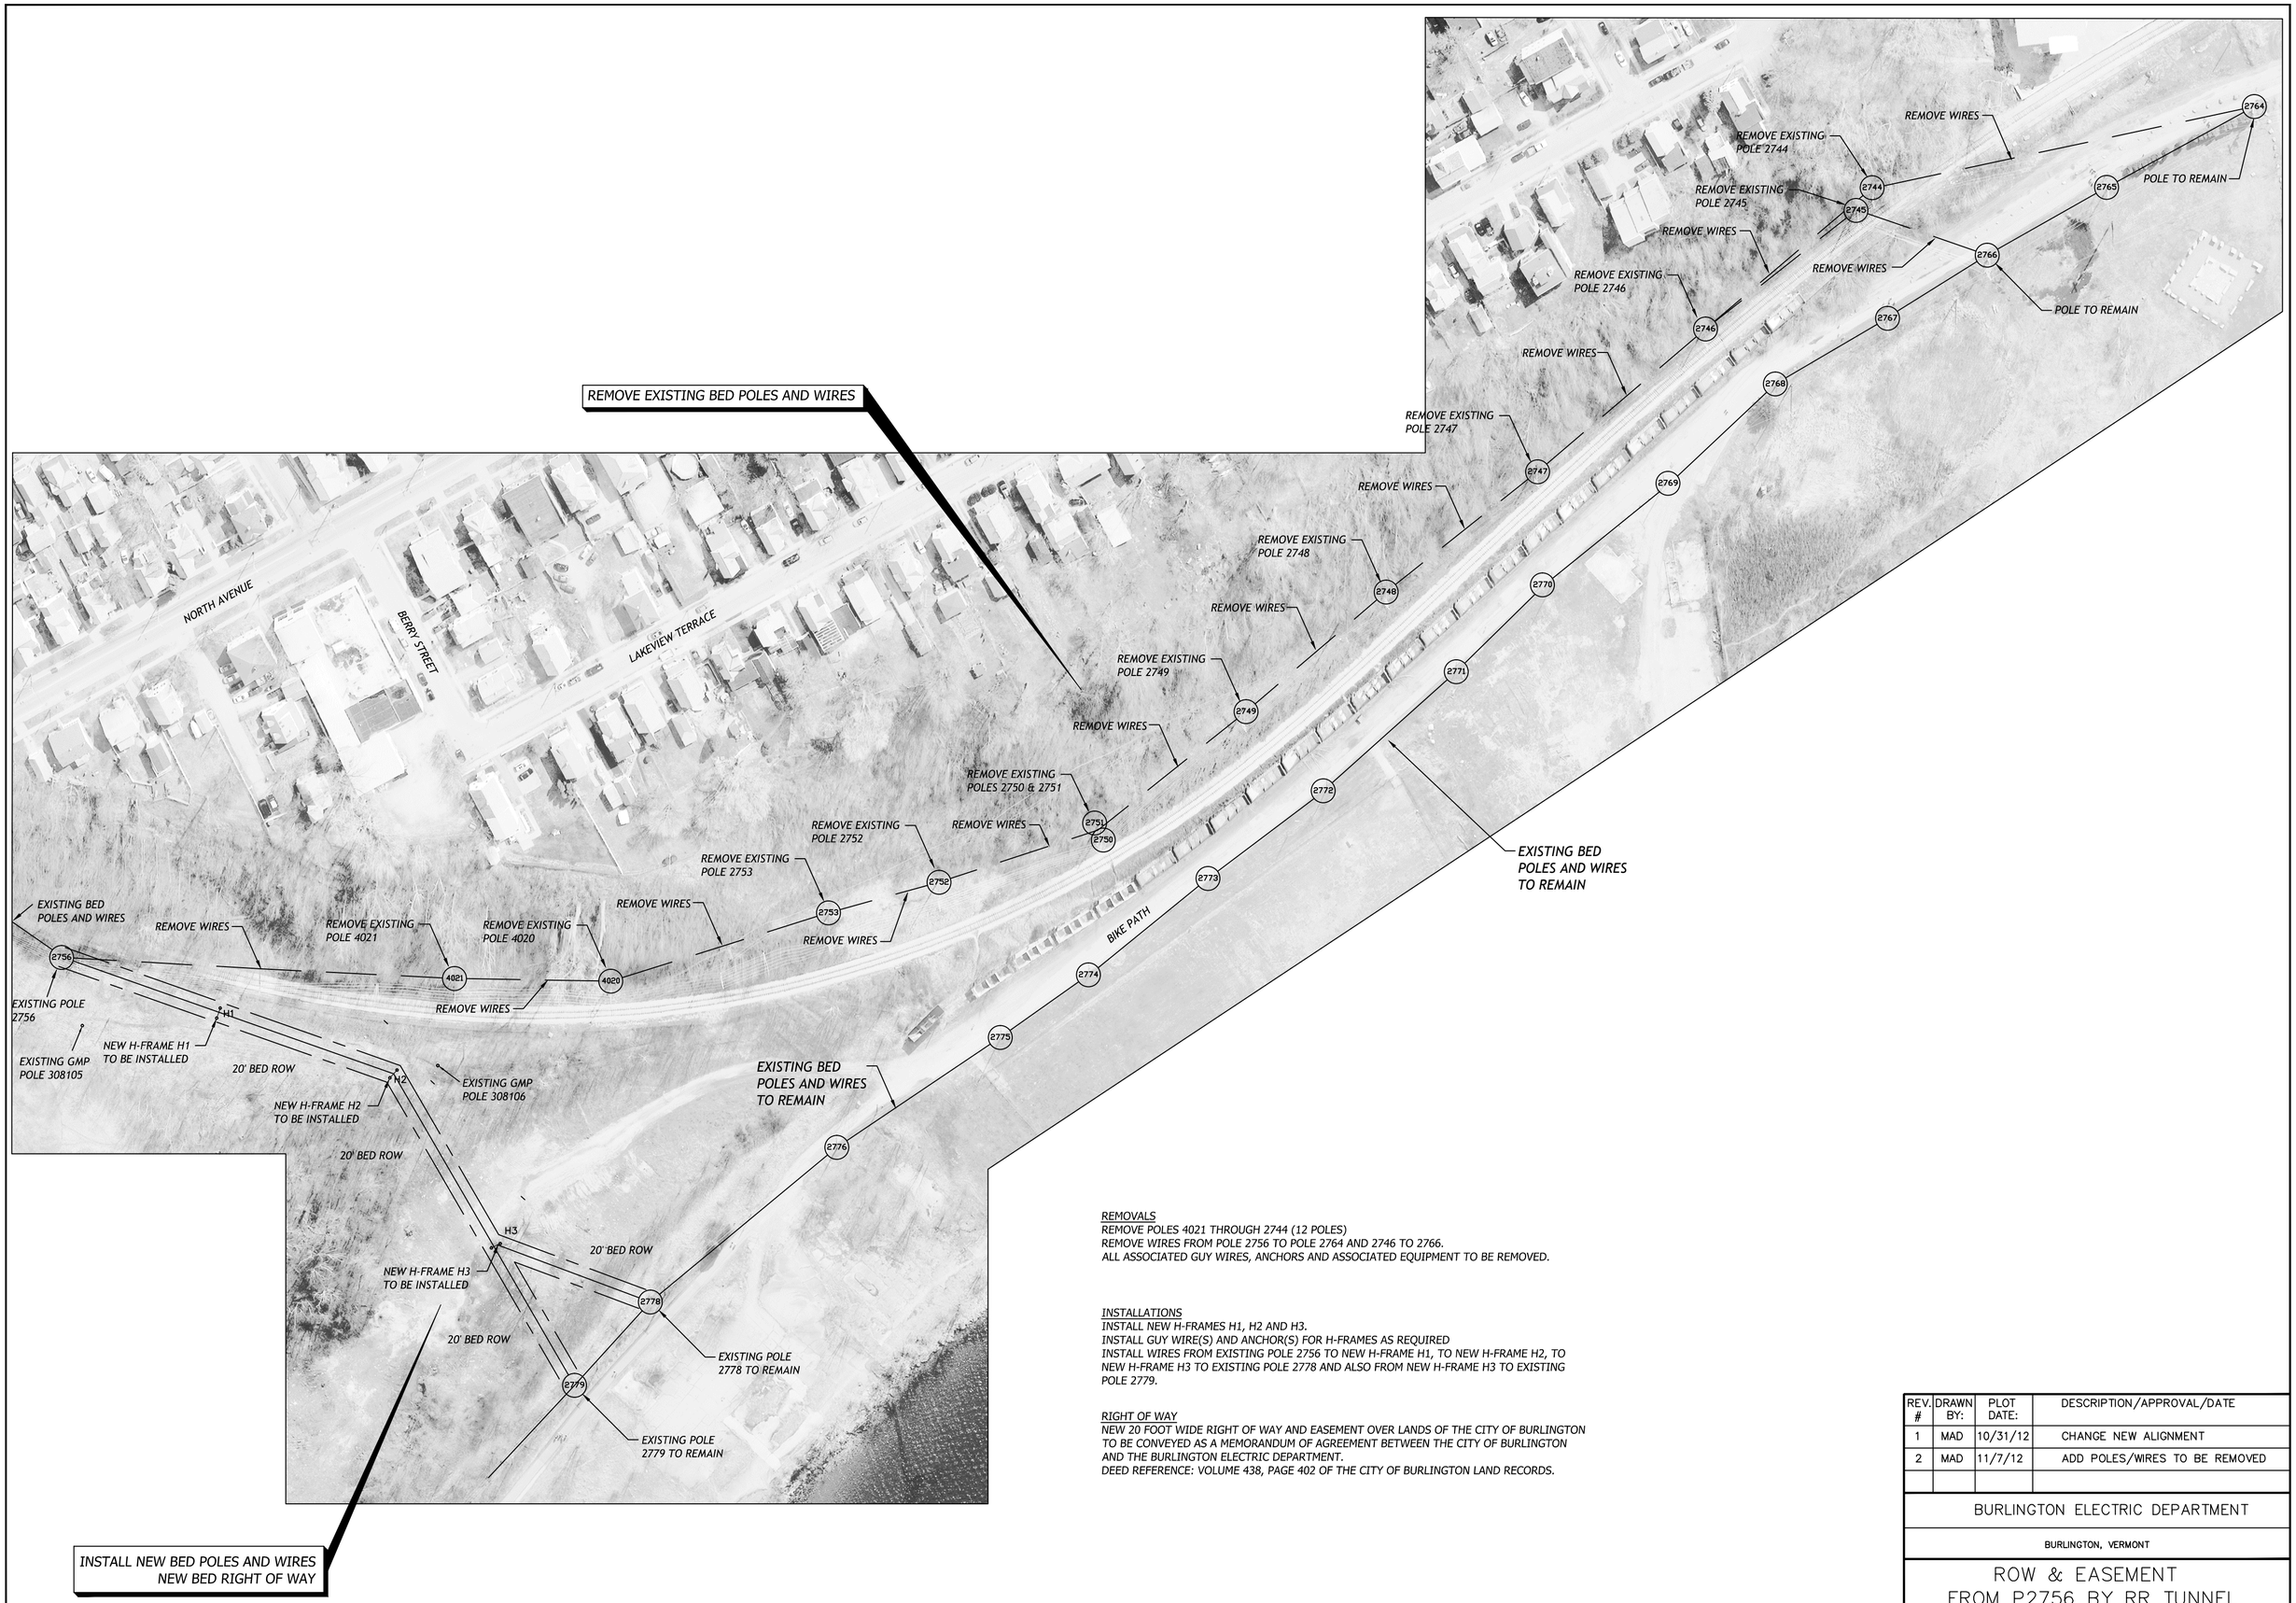

REMOVALS
REMOVE POLES 4021 THROUGH 2744 (12 POLES)
REMOVE WIRES FROM POLE 2756 TO POLE 2764 AND 2746 TO 2766.
ALL ASSOCIATED GUY WIRES, ANCHORS AND ASSOCIATED EQUIPMENT TO BE REMOVED.

INSTALLATIONS
INSTALL NEW H-FRAMES H1, H2 AND H3.
INSTALL GUY WIRE(S) AND ANCHOR(S) FOR H-FRAMES AS REQUIRED
INSTALL WIRES FROM EXISTING POLE 2756 TO NEW H-FRAME H1, TO NEW H-FRAME H2, TO NEW H-FRAME H3 TO EXISTING POLE 2778 AND ALSO FROM NEW H-FRAME H3 TO EXISTING POLE 2779.

RIGHT OF WAY
NEW 20 FOOT WIDE RIGHT OF WAY AND EASEMENT OVER LANDS OF THE CITY OF BURLINGTON TO BE CONVEYED AS A MEMORANDUM OF AGREEMENT BETWEEN THE CITY OF BURLINGTON AND THE BURLINGTON ELECTRIC DEPARTMENT.
DEED REFERENCE: VOLUME 438, PAGE 402 OF THE CITY OF BURLINGTON LAND RECORDS.

REV. #	DRAWN BY:	PLOT DATE:	DESCRIPTION/APPROVAL/DATE
1	MAD	10/31/12	CHANGE NEW ALIGNMENT
2	MAD	11/7/12	ADD POLES/WIRES TO BE REMOVED

BURLINGTON ELECTRIC DEPARTMENT

BURLINGTON, VERMONT

ROW & EASEMENT
FROM P2756 BY RR TUNNEL
TO LAKE ST. EXTENSION/BIKEPATH

DRAWN BY: AJN	SCALE: 1"=100'	DWG. NO.: C3740100
PLOT DATE: 10/6/10	CHECKED BY/DATE	SHEET 1 OF 1