City of Burlington

Construction

Great Streets BTV

St. Paul Street Update

Great Streets BTV

St. Paul Street Presentation August 9, 2018

Agenda

- Team
- Schedule
- Plans & Property Lines/Parklets
- Construction Traffic Control
- Outreach/Resources
- Questions

Team

- **DPW**
  - Laura Wheelock
    Project Manager
  - Ashley Toof
    Project Manager
  - Rob Goulding
    Outreach
- **CEDO**
  - Kirsten Merriman-Shapiro
    Project Manager

- **SD Ireland** *General Contractor*

- **EIV Technical Services**
  Resident Engineer &
  City's On-Site Representative

- **Dubois & King** *Design Engineer*

Schedule - *Tentative*

• City Council Approval	8/13/18
• Earliest Start for Construction	8/20/18
• Road Closed to All Through Traffic until	11/16/18
• Winter Construction *(Select/Specialized)*	11/2018-3/2019
• Resume Construction	4/2019
• Complete All Work	5/24/19

St. Paul –Main to King Plan

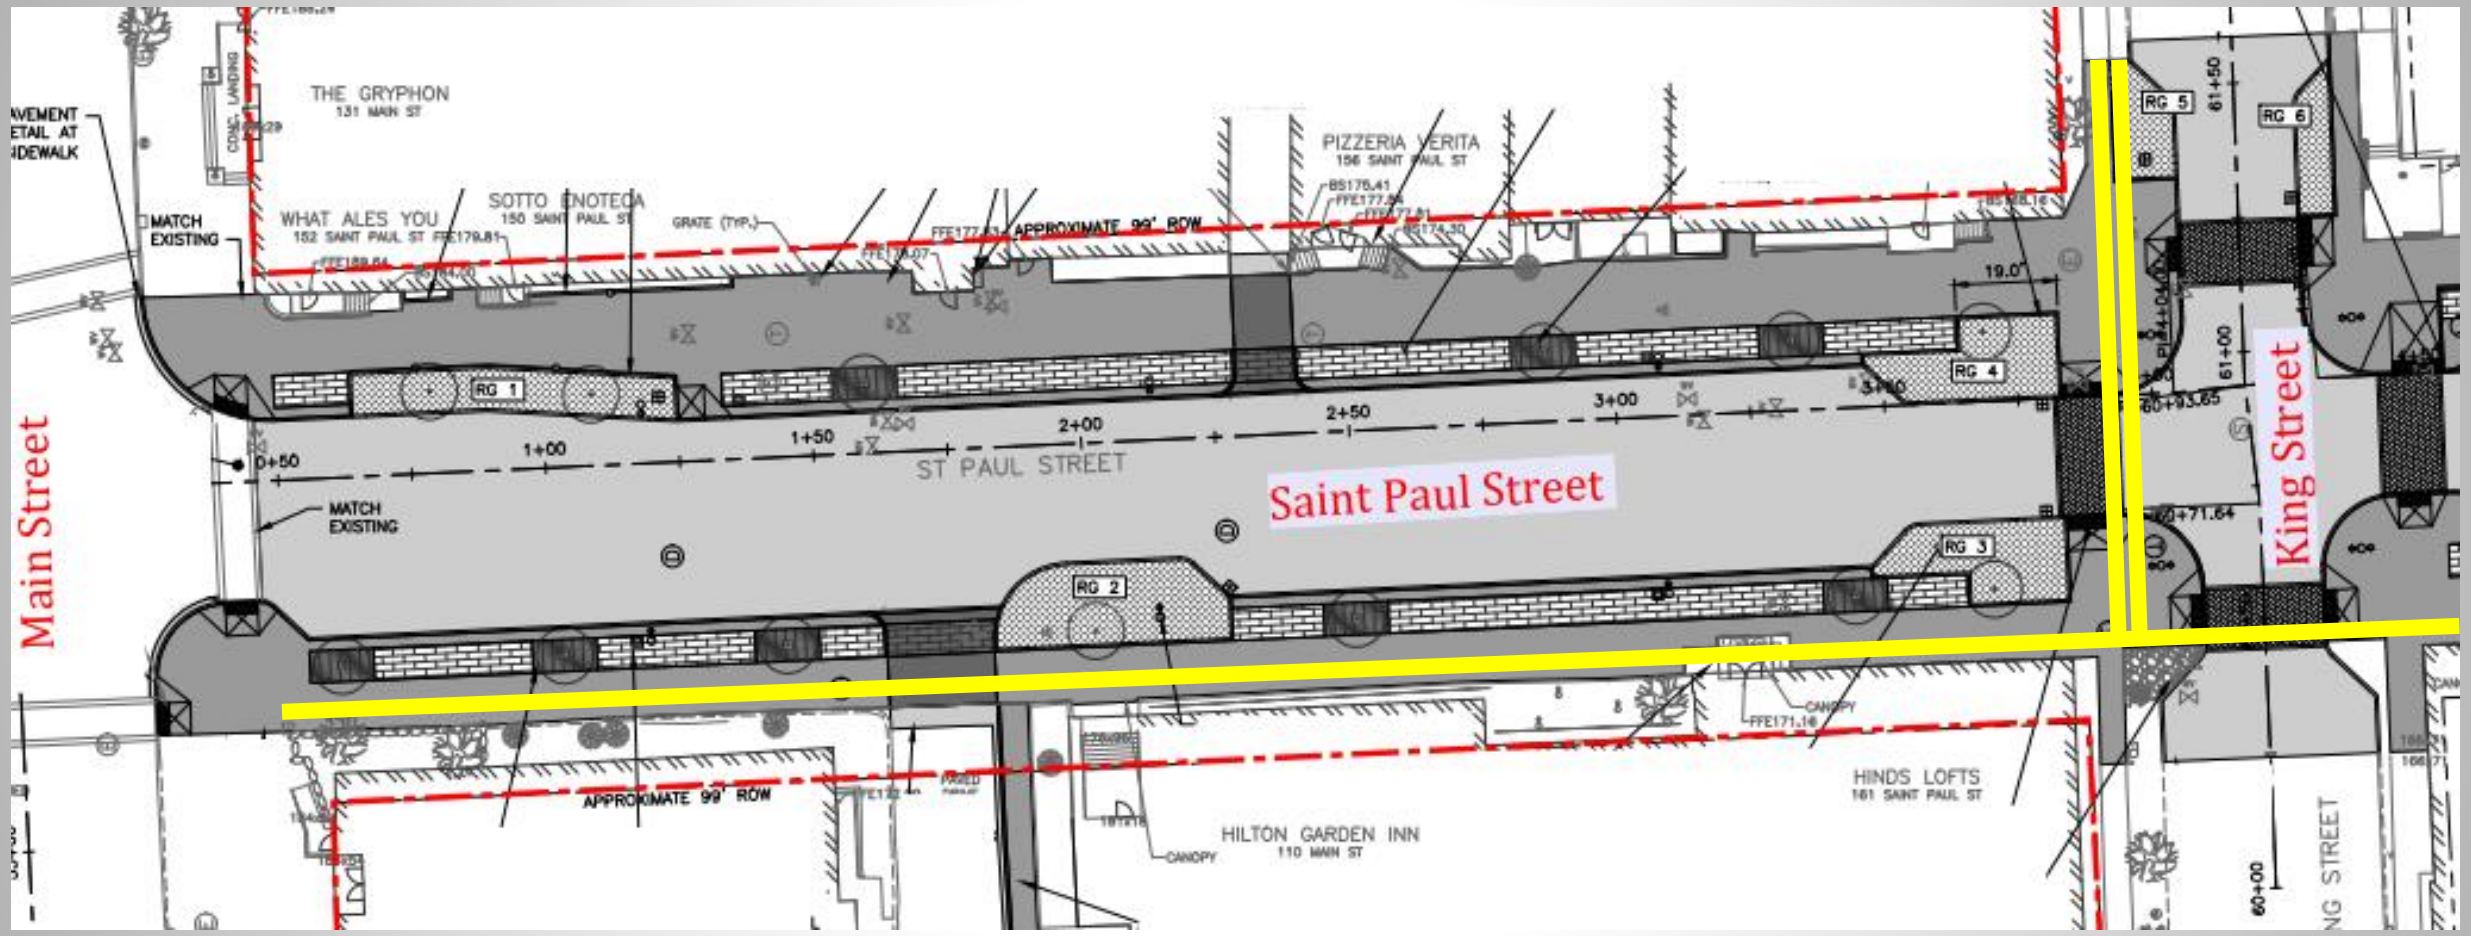

Great Streets BTV

St. Paul Street Presentation August 9, 2018

St. Paul –King to Maple Plan

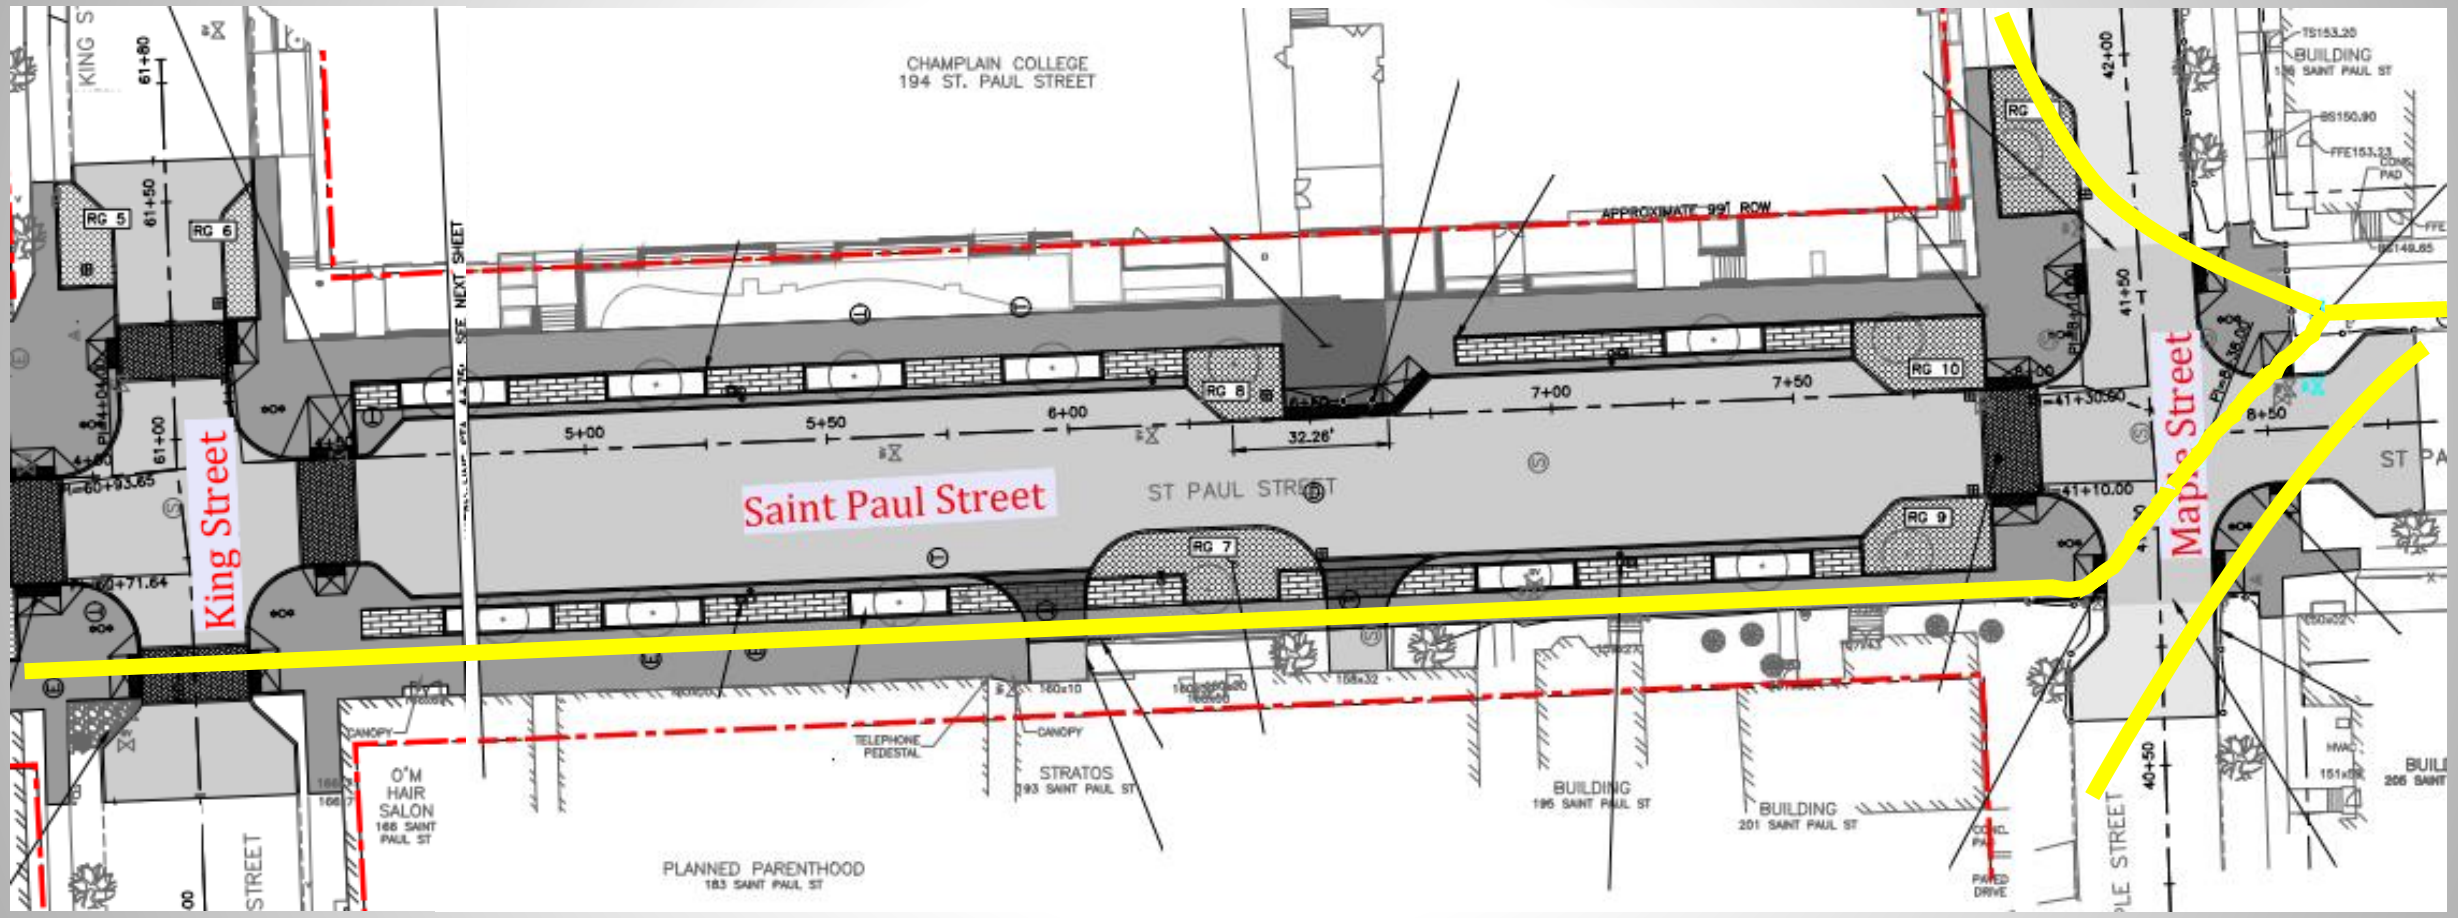

Great Streets BTV

St. Paul Street Presentation August 9, 2018

St. Paul – Property Line/Parklet

- Right of Way for St Paul = 99 feet
- Building Encroachments – License Agreement
- Stairs/Ramp Encroachments – License Agreement
- Parklet (Tree Belt or Parking Lane)
  - Tables/Chairs
  - Public/Private Spaces
  - License Agreement

Traffic Control - *Tentative*

- Pedestrian Access to Businesses – maintained while business open/occupied
- Pedestrian Access to Residences – at all times
- Road will be closed to all through traffic; *local traffic to Stratos and exit to Hilton Garden maintained except for proximate adjacent work*
- Bicycles will need to follow detour signage or walk bicycles through designated pedestrian paths
- GMT – adjusting bus routes during construction

Traffic Control - *Tentative*

- Parking
  - No on-street parking during full road closure
  - Most parking available through Winter Construction
  - Some parking available during Spring 2019 Construction
  - New proximate parking at 194 St. Paul Street
- Deliveries
  - On adjacent side streets – hand cart to door
  - Temporary loading zone 7am-4pm added on Main Street during full closure (3 spaces in front of Gryphon)

Order of Work - *Tentative*

Fall/Winter 2018

- Ductbank under west sidewalk
- Utility Vaults and Stormwater piping
- Silva Cells and Road Subbase/Curbing
- Paving 1st layer
- Concrete Sidewalks – Pervious Pavers
- Utility Relocations

Order of Work - *Tentative*

Spring 2019

- Stormwater Gardens
- Sidewalks & Pavers
- Tree Wells & Plantings
- Remove Utility Poles and Finish Tree Belt
- Paving 2nd & 3rd Layers
- Pavement Markings

Outreach/Resources

- Neighborhood Meetings
- Project Website & Social Media (FB/Twitter/FPF)
- City Staff (DPW/CEDO)
- On-Site Representative (EIV Technical Services)

Questions

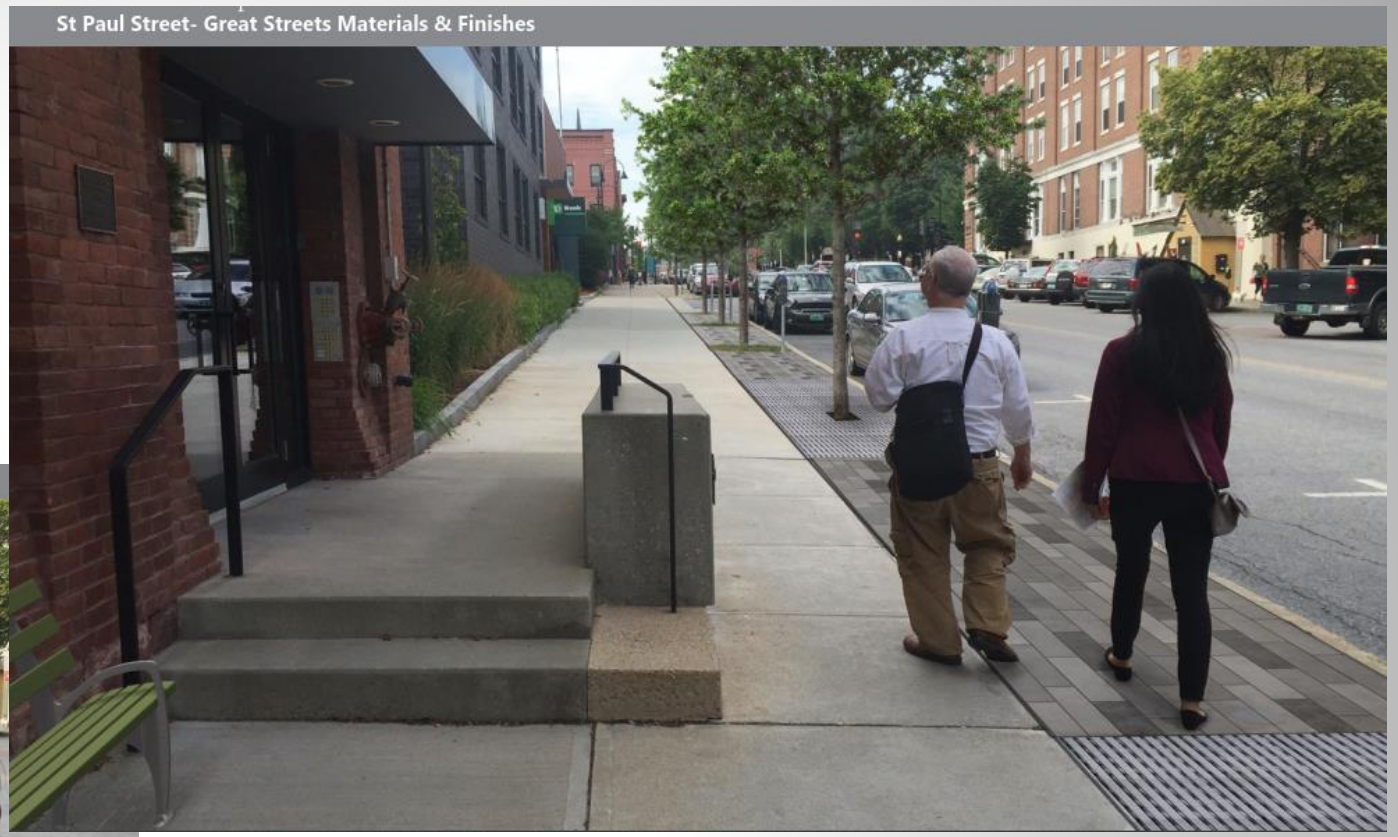

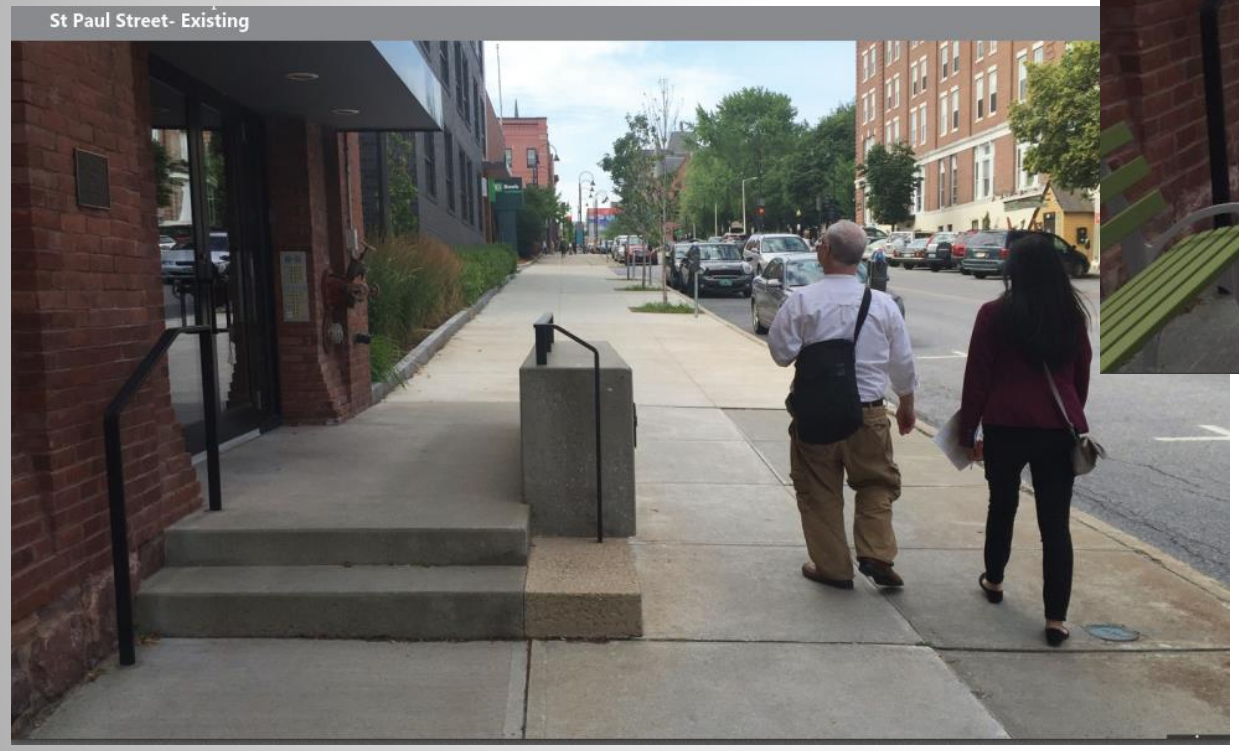

Great Streets BTV

St. Paul Street Presentation August 9, 2018